

Tel ++49 40 540093-0

Fax ++49 40 540093-90

E-mail [info@willbrandt.de](mailto:info@willbrandt.de)

Expansion Joint

Rubber

PTFE


Fabric

Inquiry

Company: \_\_\_\_\_  
Name/Dept.: \_\_\_\_\_  
Street/P.O.Box: \_\_\_\_\_  
Zip code/City: \_\_\_\_\_

Phone.: \_\_\_\_\_  
Fax.: \_\_\_\_\_  
e-mail: \_\_\_\_\_  
Date: \_\_\_\_\_

Order

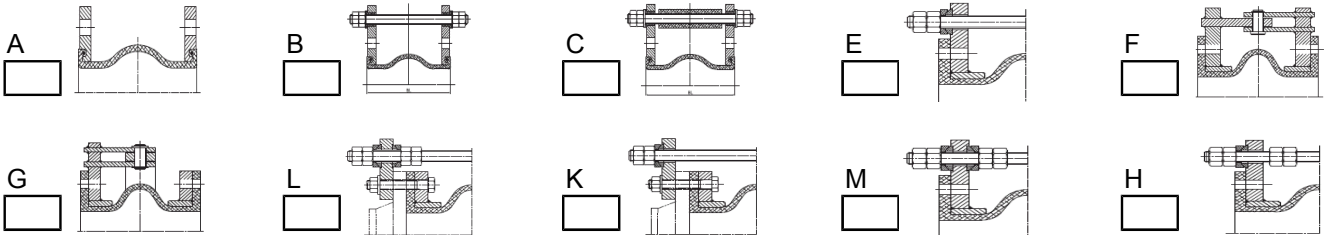

Type / Description (colour): \_\_\_\_\_

Quantity: \_\_\_\_\_ piece      DN: \_\_\_\_\_      Face to face: \_\_\_\_\_ mm

Fluid: \_\_\_\_\_

Design pressure: \_\_\_\_\_ bar [overpressure]      Design temperature: \_\_\_\_\_ °C  
Working pressure: \_\_\_\_\_ bar [overpressure]      Working temperature: \_\_\_\_\_ °C  
Test pressure: \_\_\_\_\_ bar [overpressure]      max. Temp. : \_\_\_\_\_ °C  
Vacuum: \_\_\_\_\_ bar abs.      Flow rate: \_\_\_\_\_ m/s  
Pressure surge  yes  no      Overlay movements: \_\_\_\_\_

axial extension: + \_\_\_\_\_ mm  
axial compression: - \_\_\_\_\_ mm  
lateral: +/- \_\_\_\_\_ mm  
angular: +/- \_\_\_\_\_ degree

**Flangeconnection**

Flange standard / Nominal pressure: \_\_\_\_\_  
 Special flange dimension      ▶ ▶ ▶ ▶ ▶ Corrosion protection: \_\_\_\_\_  
 Material: \_\_\_\_\_      Outside diameter: Ad \_\_\_\_\_ mm  
 Connection acc. to attached specification      Bolt circle diameter: Lk \_\_\_\_\_ mm  
Number of holes n \_\_\_\_\_ pcs  
Hole diameter d2 \_\_\_\_\_ mm

**Accessories**

Flame protec. cover \_\_\_\_\_  
 Sun protec. Cover \_\_\_\_\_  
 Earth cover \_\_\_\_\_  
 Vakuum support. Ring \_\_\_\_\_  
 Deflector sleeve \_\_\_\_\_

**Certification/Approvals/Regulations**

Approval test: \_\_\_\_\_      Certificates: \_\_\_\_\_  
Pressure test: \_\_\_\_\_      Regulations: \_\_\_\_\_